

RSTDG5V6F

Transil array for data protection

General Description

The RSTDG5V6F is monolithic suppressor designed to protect components connected to data and transmission lines against ESD. This device clamps the voltage just above the logic level supply for positive transients and to a diode drop below ground for negative transients.

Applications

- Computers
- Printers
- Communication systems
- Cellular phones handsets and accessories
- Wireline and wireless telephone sets
- Set top boxes

Features

- 4 Unidirectional Transil functions
- Low leakage current: < 1 μ A
- Very small PCB area < 4.2 mm² typically
- High integration

Complies with the following standards

IEC61000-4-2

Level 4 15 kV (air discharge)

8 kV(contact discharge)


MIL STD 883E - Method 3015-7 Class 3

25 kV HBM (Human Body Model)

Functional diagram



SOT-353




Absolute Ratings ($T_{amb}=25^{\circ}C$)

Symbol	Parameter	Value	Units
P_{PP}	Peak Pulse Power ($t_p = 8/20\mu s$)	150	W
T_L	Maximum lead temperature for soldering during 10s	260	$^{\circ}C$
T_{stg}	Storage Temperature Range	-40 to +125	$^{\circ}C$
T_{op}	Operating Temperature Range	-40 to +125	$^{\circ}C$

Electrical Parameter

Symbol	Parameter
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Maximum Reverse Leakage Current @ V_{RWM}
I_T	Test Current
V_{BR}	Breakdown Voltage @ I_T
I_F	Forward Current
V_F	Forward Voltage @ I_F

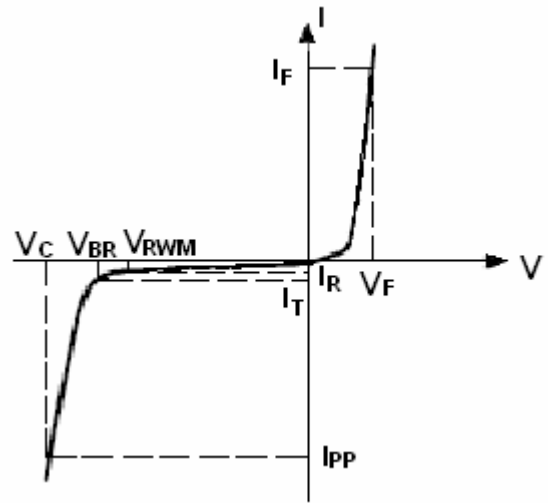

Electrical Characteristics

Part Numbers	V_{BR}			I_T	V_{RWM}	I_R	V_F	I_F	C
	Min.	Typ	Max.				Max.		Typ. 0v bias
	V	V	V				V		pF
RSTDG5V6F	6.1	6.7	7.2	1	5	1	1.25	200	15

1. Square pulse $I_{PP}=15A, t_p=2.5\mu s$ 2. $V_{BR}=aT^*(T_{amb}-25^\circ C)*V_{BR}(25^\circ C)$

Typical Characteristics

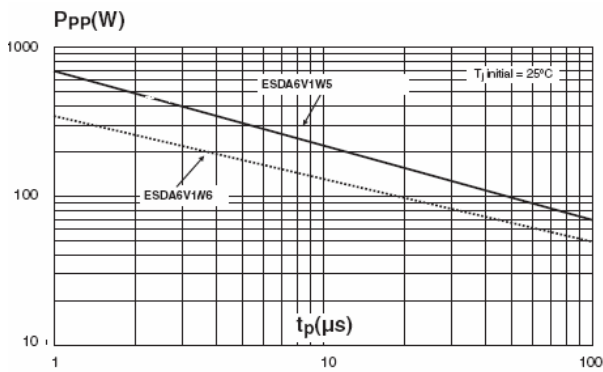


Fig1. Peak pulse power versus exponential Pulse duration (T_j initial=25°C)

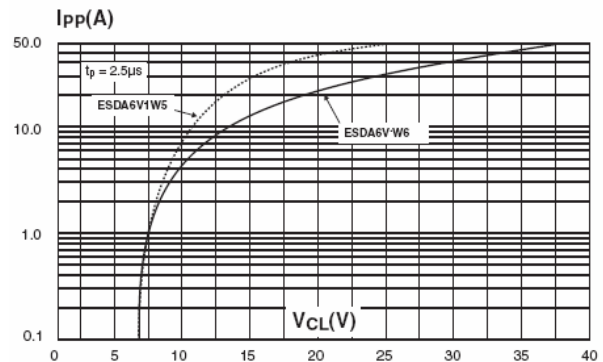


Fig2. Clamping voltage versus peak pulse current (T_j initial=25°C, rectangular Waveform, $t_p=2.5\mu s$)


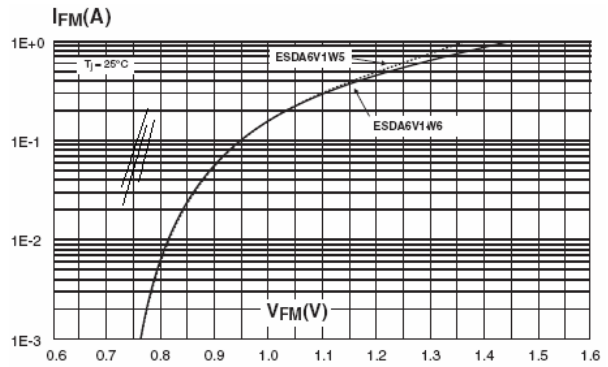


Fig 3 Capacitance Versus reverse applied voltage Fig 4 Peak Forward Voltage Drop versus forward current

SOT-353 Mechanical Data

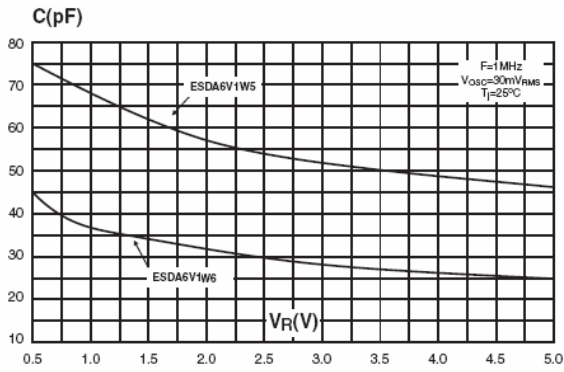